

BOREALIS

FLOORING SPECS

Features	Benefits
20mil Wearlayer	Residential & Light Commercial
4 Sided Painted Bevel	Realistic Wood Appearance
Rigid Core Construction	Dimensionally Stable No T-Molds in Residential Install
FloorScore Certified	Product meets strict indoor air quality requirements

SPECIFICATIONS

Dimensions:	6.5mm thick x 7" wide x 48" length
Packaging:	18.91 sf/ctn, 8 pcs/ctn, 55 ctn/plt, 1,040 sf/plt
Construction:	Rigid Core Waterproof Vinyl Click, 1.5mm Pad Attached
Wear Layer:	20mil Polyurethane
Warranty:	30-Yr Residential, 10-Yr Light Commercial
Installation:	Angle/Tap
Coordinating Trim:	Waterproof - End Cap, Quarter Round, Reducer, Stair Nose and T-mold Available
Gloss:	Low
Profile:	4-Side Painted Bevel
Pattern Repeat:	6 Unique Plank Visuals



*hydronic systems only



up to 26' x 36'



BOREALIS

COORDINATING TRIMS

BOREALIS


TRIM PROFILES & MEASUREMENTS

TRIM DESCRIPTION


QUARTER ROUND

Applied to cover the expansion gap between the flooring and the wall.

TRIM PROFILE

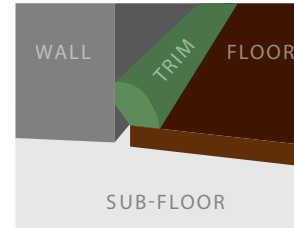


TRIM DIMENSIONS

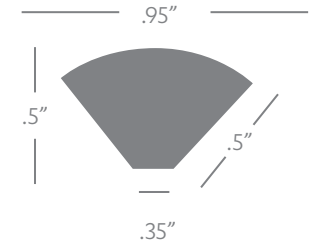



END CAP

Often times called Square Edge or Threshold, used when butting up to carpet or a sliding glass door.

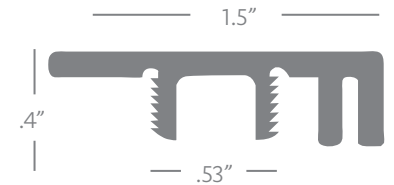



T-MOLD

Joins two floors of equal height, such as in a doorway, between two rooms or in a large area where the maximum length/width is exceeded.

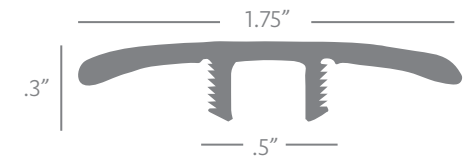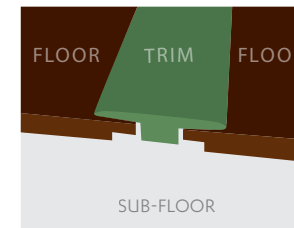

STAIR NOSE

Ends flooring at the top of either a landing or downward staircase.

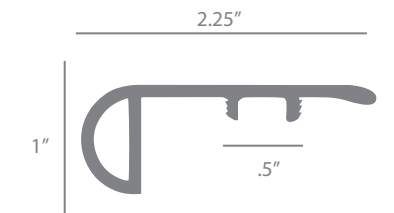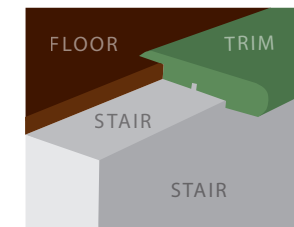

REDUCER

Ends the flooring onto a surface such as concrete.

